Product Data Sheet

Low-Profile Wallmount Cabinets







NOTE: Extended length models not shown.

OVERVIEW

Low-Profile Wallmount Cabinets are a dependable choice for tight networking environments and security-sensitive applications. Unique vertical racking keeps your equipment out of the way while connectors stay easily accessible.

Durable steel construction makes these models a good choice for industrial spaces and expanding businesses.

FEATURES

- Space-saving vertical mounting for network devices.
- Mount out of the way on nearly any wall or vertical surface.
- Models with 2U, 4U, or 6U of rack space.
- Heavy-duty steel construction.
- 2U, 4U, or 6U of 19" EIA-310 square hole rails.
- 2-point equipment mounting, 24" or 36" equipment depth.
- Mounting rails have 4" of vertical adjustment inside cabinet.
- 200 lb. (90.9 kg) equipment capacity.
- Top door for monitoring access.
- Front door for maintenance access.
- 16" C/C and 19" C/C mounting holes (4-point mounting for both widths).
- Mesh on doors allows for secure cooling.
- Piano hinges on front and top doors ensure secure / strong door-to-body connection.
- Up to (4) top and (4) bottom 1" (2.5 cm) or 2" (5 cm) conduit knock-outs.
- Reversible front door allows for L or R opening.
- Front and top door have positive retention locks ensuring doors to open when unlocked unless activated.
- Secure models have fan mounts and vented bottom for heat reduction.
- EIA compliant.
- 4U and 6U models can accommodate two optional 4.5-inch fans on the bottom (part number RMT373-R2).

SPECIFICATIONS

SPECIFICATION	RMT351A	RMT351LA	RMT352A-R3	RMT352LA	RMT353A-R3	RMT353LA
Flnish	Powder Coat	Powder Coat	Powder Coat	Powder Coat	Powder Coat	Powder Coat
Color	Black	Black	Black	Black	Black	Black
Construction	Welded Steel, 1.2 mm (18 ga.) to 2.0 mm (14 ga.)	Welded Steel, 1.2 mm (18 ga.) to 2.0 mm (14 ga.)	Welded Steel, 1.2 mm (18 ga.) to 2.0 mm (14 ga.)	Welded Steel, 1.2 mm (18 ga.) to 2.0 mm (14 ga.)	Welded Steel, 1.2 mm (18 ga.) to 2.0 mm (14 ga.)	Welded Steel, 1.2 mm (18 ga.) to 2.0 mm (14 ga.)
Outside Height	29.44" (74.77 cm)	41.44" (105.26 cm)	29.44" (74.77 cm)	41.46" (105.31 cm)	29.44" (74.77 cm)	41.47" (105.34 cm
Outside Width	22.42" (56.94 cm)	22.42" (56.94 cm)	22.42" (56.94 cm)	22.42" (56.94 cm)	22.42" (56.94 cm)	22.42" (56.94 cm)
Outside Depth	5.25" (13.34 cm)	5.25" (13.34 cm)	8.75" (22.23 cm)	8.75" (22.23 cm)	12.25" (31.12 cm)	12.25" (31.12 cm)
Rack Units (U)	2U	2U	4U	4U	6U	6U
Racking Depth	24" (60.9 cm)	36" (91.4 cm)	24" (60.9 cm)	36" (91.4 cm)	24" (60.9 cm)	36" (91.4 cm)
Environmental	Indoor	Indoor	Indoor	Indoor	Indoor	Indoor
Load Capacity	200 lb. (90.9 kg)	200 lb. (90.9 kg)	200 lb. (90.9 kg)	200 lb. (90.9 kg)	200 lb. (90.9 kg)	200 lb. (90.9 kg)
Weight	33 lb. (15.0 kg)	38 lb. (17.2 kg)	39 lb. (17.7 kg)	45 lb. (20.4 kg)	45 lb. (20.4 kg)	51 lb. (23.2 kg)
Conduit	(4) 1" diameter holes on top, (4) 1" diameter holes on bottom	(4) 1" diameter holes on top,(4) 1" diameter holes on bottom	(3) 2" diameter holes on top, (2) 1" diameter holes on top	(3) 2" diameter holes on top, (2) 1" diameter holes on top	(3) 2" diameter holes on top, (2) 1" diameter holes on top	(3) 2" diameter holes on top, (2) 1" diameter holes on top
*Fans (located on bottom)	None	None	(2) 4.5" fans	(2) 4.5" fans	(2) 4.5" fans	(2) 4.5" fans

^{*}NOTE: The fans are optional and ordered separately (part number RMT373-R2).

RMT352A-R2 APPLICATION PHOTOS





877-877-2269 | blackbox.com

RMT351A



RMT351A, front view



RMT351A, back view



877-877-2269 | blackbox.com

RMT352A-R3

4



RMT352A-R3, front view



RMT352A-R3, back view



877-877-2269 | blackbox.com

RMT353A-R3






RMT353A-R3, back view




DIMENSIONAL DIAGRAMS

RMT351A

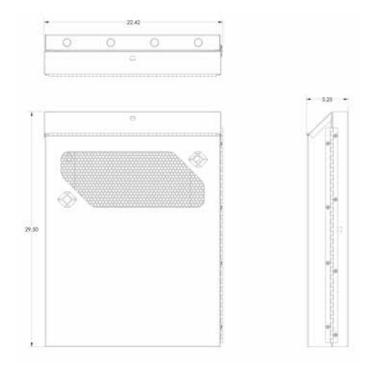

RMT351LA


6

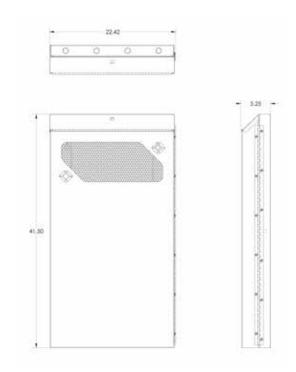


877-877-2269 | blackbox.com

DIMENSIONAL DIAGRAMS

RMT352A-R3

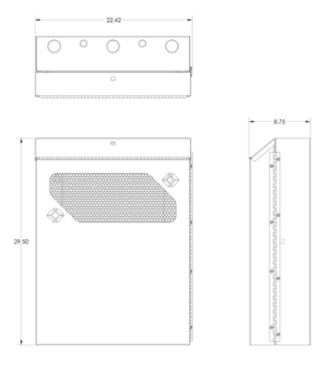



RMT352LA

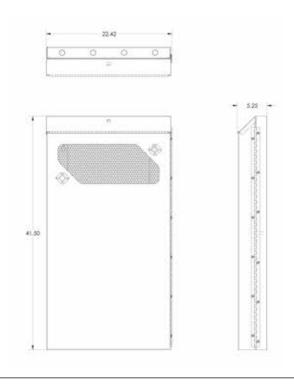

DIMENSIONAL DIAGRAMS

RMT353A-R3








RMT353LA







ORDERING INFORMATION

Item	Code
2U Low-Profile Vertical Wallmount Cabinet	
24"D	RMT351A
36"D	RMT351LA
4U Low-Profile Vertical Wallmount Cabinet	
24"D	RMT352A-R3
36"D	RMT352LA
6U Low-Profile Vertical Wallmount Cabinet	
24"D	RMT353A-R3
36"D	RMT353LA
4.5"Fan, 92 CFM for RMT352A-R3 and RMT353A-R3	RMT373-R2

DISCLAIMER

Black Box Corporation shall not be liable for damages of any kind, including, but not limited to, punitive, consequential or cost of cover damages, resulting from any errors in the product information or specifications set forth in this document and Black Box Corporation may revise this document at any time without notice.

ABOUT BLACK BOX

Black Box is a world leading technology solutions provider specializing in complete high-performance KVM, professional A/V signal distribution and extension and switching solutions for mission-critical applications. Black Box is dedicated to delivering superior project engineering, technical support, and 24/7 customer service you can rely on for your most critical operations. Every day, our customers trust us to design, integrate, and maintain reliable control room solutions for broadcasting, post-production, stadiums & arenas, medical, air traffic control, oil & gas, government & military, and utility industries. Leave the tech to us and our comprehensive technology solutions will deliver secure connections, fast-response times, real-time collaboration and more.

© Copyright 2017. Black Box Corporation. All rights reserved. Black Box® and the Double Diamond logo are registered trademarks of BB Technologies, Inc. Any third-party trademarks appearing in this publication are acknowledged to be the property of their respective owners.